

Mobtown Offroad

Recovery Bar Installation

Step 1




Use a screwdriver to unclip the push clips along the top of the grille. Remove clips from grille.

Step 2



Remove bolts on the top of the grille.

Step 3

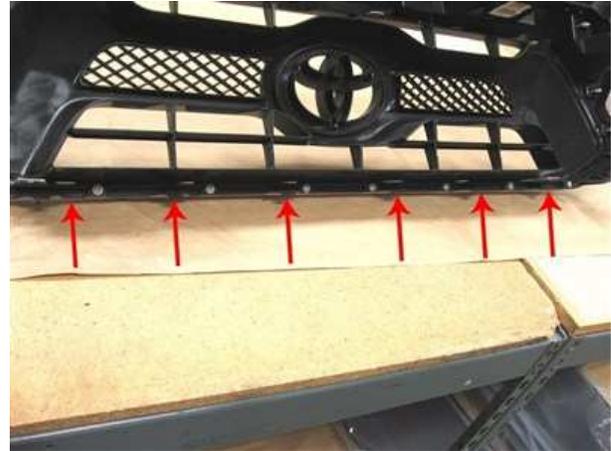

In order to remove grille shell you must unclip the six plastic tabs along the bottom of the grille shell. Start at one side with the first clip, pull forward on the grille shell while unclipping tab from the back side one at a time.

[Step 4](#)



Remove the plastic clips along the top of the bumper cover

[Step 5](#)



Remove bolts along the front underside of the bumper.

[Step 6](#)



Remove the bolts on the right and left underside of the bumper.

[Step 7](#)



Remove the bolt located in the front section of the fender well as shown.

[Step 8](#)



Remove plastic filler panel under headlight. The filler panel has a plastic clip on the backside. Once unclipped the filler will slide out. Be careful to pull straight or the filler panel will break.

[Step 9](#)



The bumper cover will release from the clip by pulling away from the vehicle.

[Step 10](#)



Remove the bumper from the vehicle. Make sure to unclip fog lamp wiring harness if necessary.

Step 11



Remove (3) nuts from each side of the front crash bar. This will allow removal of the crash bar from the rectangular aluminum supports. The crash bar will be reused.



Step 12



Remove both aluminum crash bar supports by removing the nuts and sliding it off the studs.

Step 13




Install the Mobtown Recovery Bar onto the studs from which the crash bar supports were removed. Reuse (3) nuts per side from the crash bar supports. Note: The studs may need to be bent back into alignment. Use a rubber mallet to gently tap them straight so the Recovery Bar slips on all (6) studs smoothly.

Step 14



Reinstall the crash bar (not including the supports) onto the studs in the front of the Recovery Bar. Reuse the remaining nuts from the crash bar.

[Steps 15](#)

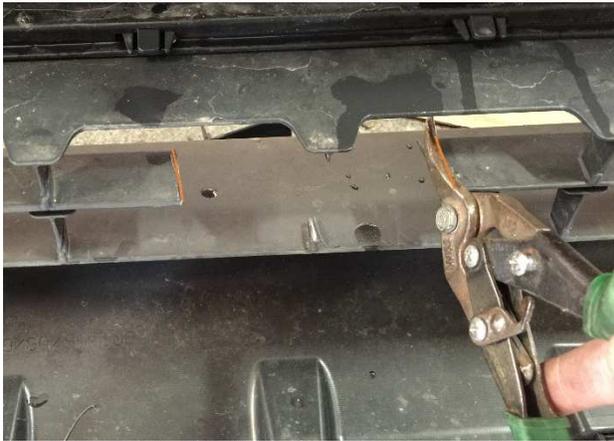

Trim the lower grill so allow for the shackle anchors and the hitch receiver to pass through.

[Steps 16](#)



Check that all bolts are tight. Reinstall bumper by following the above steps in reverse.